



TEGERA® 886

Synthetic glove, nitrile, 3/4 dipped, smooth finish, 15 gg, Lycra®, nylon, Cat. II, black, yellow, water and oil repellent palm, for fine assembly work

PROPERTIES

Good fingertip sensitivity, flexible, durable, good grip, good fit, comfortable, light

SPECIFICATION

TYPE OF GLOVE Work gloves - General handling

CATEGORY Cat. II

SIZE RANGE (EU) 6, 7, 8, 9, 10, 11

DIPPING 3/4 dipped

DIPPING MATERIAL Nitrile

LINING MATERIAL 15 gg, Lycra®, Nylon

DEXTERITY 5

GRIP PATTERN Smooth finish

CUFF STYLE Knitwrist cuff

CUFF MATERIAL Textile

LENGTH RANGE 230 - 280mm

COLOUR Black, Yellow

PAIRS PER PACKAGE/CARTON 12/120

PIECES PER BOX 0

DISPLAY Bag with euro slot OUTER MATERIAL

SPECIFICATION Nitrile

INNER MATERIAL SPECIFICATION Nylon, elastane

SIZE	ART. NO.	EAN NO.
7	886-7	7392626032354
8	886-8	7392626032378
9	886-9	7392626032385
10	886-10	7392626032392
6	886-6	7392626063068
11	886-11	7392626063099

All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.

TEGERA® 886

FEATURES

Water and oil repellent palm and knuckle

PREVENTS RISK OF

Abrasion injuries, scratches, lacerations

PRIMARY ENVIRONMENTS OF USE

Moist environments, oily and greasy environments, dirty environments

PRIMARY AREAS OF USE

Airport work, assembly, building and construction, carpentry, construction, electrical installation, fine assembly, HVAC installation, inspection work, installation work, soil preparation, warehouse work


PRIMARY INDUSTRIES OF USE

Machinery and equipment, MRO, automotive, transportation

TYPE OF WORK

Light weight

2(3)

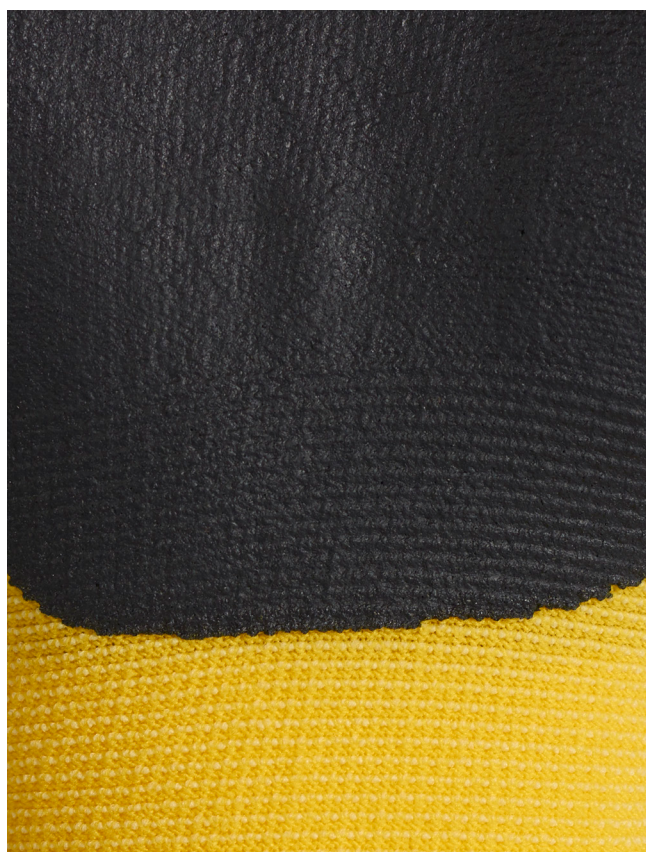

CE Cat. II

EN 420:2003
+ A1:2009



EN 388:2016
412XX



All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.

2021-01-22

ejendals
PROTECTING HANDS AND FEET

EJENDALS AB

Box 7, SE-793 21 Leksand, Sweden

Phone +46 (0) 247 360 00

Fax +46 (0) 247 360 10

info@ejendals.com

order@ejendals.com

www.ejendals.com

TEGERA® 886

EU-TYPE EXAMINATION

2777 Satra Technology Europe Ltd Bracetown Business Park, Clonee, Dublin 15, Dublin, Ireland

COMPLIANCE DESCRIPTION

EN 420:2003 + A1:2009 Protective gloves - general requirements and test methods

EU 2016/425

EN 388:2016 Protective gloves against mechanical risks

Property	Level Achieved	(Maximum Performance)
a) Resistance to abrasion (No. of revolutions)	4	(4)
b) Cut resistance (Index)	1	(5)
c) Tear resistance (N)	2	(4)
d) Puncturing resistance (N)	X	(4)
e) Cut resistance, EN ISO 13997 (N)	X	(F)
f) Impact protection, EN 13594:2015		(P)

EN 388 - Testing

(specifies the requirements that apply for each safety level).

Level of protection/Performance level	1	2	3	4	5
a) Resistance to abrasion (No. of revolutions)	100	500	2 000	8 000	
b) Cut resistance (Index)	1,2	2,5	5,0	10,0	20,0
c) Tear resistance (N)	10	25	50	75	
d) Puncturing resistance (N)	20	60	100	150	

Level of protection/Performance level	A	B	C	D	E	F
e) Cut resistance, EN ISO 13997 (N)	2	5	10	15	22	30

Level of protection/Performance level	P
f) Impact protection, EN 13594:2015	Pass (Level 1 ≤ 9 kN)



CE Cat. II

EN 420:2003
+ A1:2009



EN 388:2016
412XX



All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.

2021-01-22

ejendals
PROTECTING HANDS AND FEET

EJENDALS AB

Box 7, SE-793 21 Leksand, Sweden

Phone +46 (0) 247 360 00

Fax +46 (0) 247 360 10

info@ejendals.com

order@ejendals.com

www.ejendals.com